


Quick Connect with Manual Transfer Switch

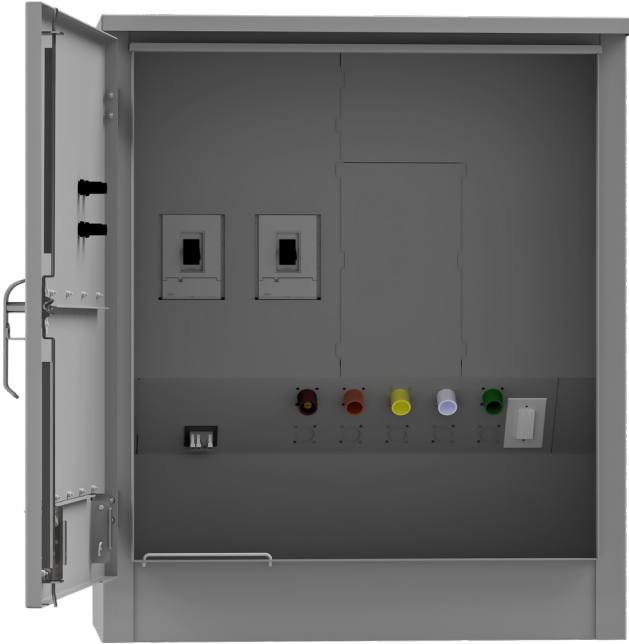

QCM Overview	
General Description.....	1
Technical Data	
Molded Case (150A - 1200A)	2
Insulated Case (1600A - 4000A)	3
QCM Selection Guide	
Characters & Designations	4
Model Code Configuration	5
Accessory Code Configuration	6
Weights & Dimensions	
Molded Case (150A - 400A)	7
Molded Case (800A - 1200A)	8
Insulated Case (1600A - 3200A)	9
Connection Information	
Lug Size & Quantity.....	10

Lake Shore Electric's QCM (Quick Connect with Manual Transfer Switch) combines the safety and functionality of a Manual Transfer Switch with the convenience of a Quick Connect Cabinet. The QCM is available in ampacities ranging from 150A to 4000A, up to 480VAC, and interrupting ratings starting at 35kAIC @480VAC. Service entrance rated configurations are also available.

Standard Features:

- Mechanically Interlocked UL 489 Switches
- 100% Rated Copper Bus
- Color-Coded Camlock Receptacles
- Switch Position Aux Contact & Indicating Lights
- Source Available Aux Contact & Indicating Lights
- Grounded Dead Front Covers
- 2-Wire Start Binding Post
- NEMA 5-20R GFCI Receptacle
- NEMA 3R Enclosure with Gray Powder Coat Finish

Optional Features:

- Service Entrance Rated
- Phase Rotation Monitor
- Space Heater
- Alternate Source Overcurrent Protection
- 304 or 316 Stainless Steel Enclosure
- Optional Leg Kit (150A-400A)

Technical Data

Molded Case (150A - 1200A)




Table 1: QCM Switching Device – Molded Case Technical Details, SER

kAIC @ 480V	Rated Current (A)	Service Entrance					
		Normal Source (Breaker)			Alternate Source (Switch)		
		2 Pole †	3 Pole	4 Pole	2 Pole †	3 Pole	4 Pole
35	150	PDG22G0150TFF	PDG23G0150TFF	PDG24G0150TFF	PDG22G0150KNSN	PDG23G0150KNSN	PDG24G0150KNSN
	400	PDG32G0400TFA	PDG33G0400TFA	PDG34G0400TFA	PDG32G0400KNSN	PDG33G0400KNSN	PDG34G0400KNSN
50	800	PDG52K0800E2M	PDG53K0800E2M	PDG54K0800E2M	PDG52K0800KNSN	PDG53K0800KNSN	PDG54K0800KNSN
	1200	PDG53K1200E5M	PDG53K1200E5M	PDG54K1200E5M	PDG52K1200KNSN	PDG53K1200KNSN	PDG54K1200KNSN
65	150	PDG22M0150TFF	PDG23M0150TFF	PDG24M0150TFF	PDG22M0150KNSN	PDG23M0150KNSN	PDG24M0150KNSN
	400	PDG32M0400TFA	PDG33M0400TFA	PDG34M0400TFA	PDG32M0400KNSN	PDG33M0400KNSN	PDG34M0400KNSN
	800	PDG52M0800E2M	PDG53M0800E2M	PDG54M0800E2M	PDG52M0800KNSN	PDG53M0800KNSN	PDG54M0800KNSN
	1200	PDG52M1200E5M	PDG53M1200E5M	PDG54M1200E5M	PDG52M1200KNSN	PDG53M1200KNSN	PDG54M1200KNSN

Table 2: QCM Switching Device – Molded Case Technical Details, Non-SER

kAIC @ 480V	Rated Current (A)	Non-Service Entrance		
		Normal & Alternate Source (Switches)		
		2 Pole †	3 Pole	4 Pole
35	150	PDG22G0150KNSN	PDG23G0150KNSN	PDG24G0150KNSN
	400	PDG32G0400KNSN	PDG33G0400KNSN	PDG34G0400KNSN
50	800	PDG52K0800KNSN	PDG53K0800KNSN	PDG54K0800KNSN
	1200	PDG52K1200KNSN	PDG53K1200KNSN	PDG54K1200KNSN
65	150	PDG22M0150KNSN	PDG23M0150KNSN	PDG24M0150KNSN
	400	PDG32M0400KNSN	PDG33M0400KNSN	PDG34M0400KNSN
	800	PDG52M0800KNSN	PDG53M0800KNSN	PDG54M0800KNSN
	1200	PDG52M1200KNSN	PDG53M1200KNSN	PDG54M1200KNSN

- Models stated above are Eaton Power Defense Molded Case Breakers and/or switches
- An electronic trip unit may be used in place of thermal-magnetic trip unit at LSE discretion
- † 3-pole variant with the center phase open may be used in place of a 2-pole at LSE discretion
- Ground Fault Protection is included on all Service Entrance options 1000A and greater with a system voltage of 480Y/277VAC
- Arcflash Reduction Maintenance System™ (ARMS™) is included on all breakers 1000A and greater
- A higher withstand rating and/or frame rating may be used in place of a lesser rating at LSE discretion
- Contact factory for technical information on switching devices or withstand ratings not listed in Table 1 or Table 2
- Data subject to change without notice

Technical Data

Insulated Case (1600A - 4000A)




Table 3: QCM Switching Device – Insulated Case Technical Details, SER

kAIC @ 480V	Rated Current (A)	Service Entrance Rated			
		Normal Source (Breaker)		Alternate Source (Switch)	
		3 Pole	4 Pole	3 Pole	4 Pole
65	1600	MPS6163HEA162F	MPS6164HEA162F	MPS6163HEANNNN	MPS6164HEANNNN
	2000	MPS6203HEA202F	MPS6204HEA202F	MPS6203HEANNNN	MPS6204HEANNNN
	3200	MPS6323HEA322F	MPS6324HEA322F	MPS6323HEANNNN	MPS6324HEANNNN
100	1600	MPSC163HEA162F	MPSC164HEA162F		
	2000	MPSC203HEA202F	MPSC204HEA202F		
	3200	MPSC323HEA322F	MPSC324HEA322F		
	4000	MPSC4N3HEA402F	MPSC4N4HEA402F	MPSC4N3HEANN	MPSC4N4HEANN


Table 4: QCM Switching Device – Insulated Case Technical Details, Non-SER

kAIC @ 480V	Rated Current (A)	Non-Service Entrance	
		Normal & Alternate Source (Switches)	
		3 Pole	4 Pole
65	1600	MPS6163HEANNNN	MPS6164HEANNNN
	2000	MPS6203HEANNNN	MPS6204HEANNNN
	3200	MPS6323HEANNNN	MPS6324HEANNNN
100	1600		
	2000		
	3200		
	4000	MPSC4N3HEANNNN	MPSC4N4HEANNNN

- Models stated above are Eaton® Magnum PXR® Low Voltage Power Circuit Breakers and/or switches
- Ground Fault Protection is included on all Service Entrance options with a system voltage of 480Y/277VAC
- Arcflash Reduction Maintenance System™ (ARMST™) is included on all breakers
- A higher withstand rating and/or frame rating may be used in place of a lesser rating at LSE discretion
- Contact factory for technical information on switching devices or withstand ratings not listed in Table 1 or Table 2
- Data subject to change without notice


QCM Selection Guide

Characters & Designations




The QCM product line has a structured, smart-style model code ordering system. The complete model code is composed of 18 customer-selected characters. Each character identifies a feature or function of the design. The first thirteen characters of the model code define the basic configuration. The five characters that follow identify the service entrance rating as well as accessories.

Sample Model Code:

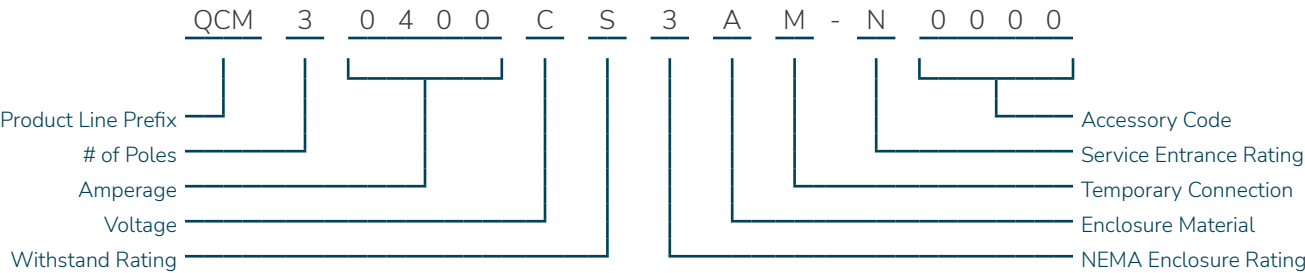

QCM Selection Guide

Model Code Configuration



Number of Poles

Following the QCM prefix of the model code is the number of poles. Available in configurations of 2-pole, 3-pole, and 4-pole, this selection is dependent on the system voltage.

Table 5: Number of Poles

Poles	Alpha Numeric
2	2
3	3
4	4

Amperage

With the exception of the 150A model, standard sizes of the QCM are available in 400A increments through 4000A. Contact the factory for alternate amperages.

Table 6: Amperage Codes

Amperage	Alpha Numeric
150A	0150
400A	0400
800A	0800
1200A	1200
1600A	1600
2000A	2000
3200A	3200
4000A	4000

Voltage Code

Identification of the voltage determines the color of camlock receptacles (per NEC standard), as well as control voltage circuits and service entrance requirements (when applicable).

Table 7: Voltage Codes

Voltage	Phase/Wire	Alpha Numeric
120/240VAC	1 Ph 3W	A
208Y/120VAC	3 Ph 4W	B
480Y/277VAC	3 Ph 4W	C
240/120VAC	3 Ph 4W	G
480VAC	3 Ph 3W	K

Withstand Rating

The below tables are based on UL 489 & 1066 Switching Device Ratings at 480VAC; Lower voltages offer higher kAIC ratings within the same alphanumeric code. Contact the factory for these ratings.

Table 8: Molded Case Withstand Code

Amperage	kAIC	Alpha Numeric
150A – 400A	35kAIC @ 480V	S
800A – 1200A	50kAIC @ 480V	S
150A – 1200A	65kAIC @480V	H

Table 9: Insulated Case Withstand Code

Amperage	kAIC	Alpha Numeric
1600A – 3200A	65kAIC @ 480V	S
4000A	100kAIC @ 480V	S
1600A – 3200A	100kAIC @480V	H

NEMA Enclosure Rating

The QCM is built with a minimum enclosure rating of NEMA 3R. Additional ratings are listed below.

Table 10: NEMA Code

Environmental Rating	Alpha Numeric
NEMA 3R	3

Enclosure Material

The standard enclosure material of the QCM is hot rolled steel with a textured ANSI 61 gray powder coat finish. Additional materials are listed below.

Table 11: Enclosure Code

Material	Alpha Numeric
Hot Rolled Steel – ANSI 61 Gray Powder Coat	A
Stainless Steel – 304 (#4 Brushed Finish)	C
Stainless Steel – 316 (#4 Brushed Finish)	D

Camlock Connection Style


Because the QCM can only be configured with male, 400A, single pole, UL 1691 listed receptacles, this character is fixed within the model code.

Table 12: Camlock Style Code

Connection Type	Ampacity	Alpha Numeric
Male	400A	M

QCM Selection Guide

Accessory Code Configuration



Service Entrance Rating Code

The service entrance option provides overcurrent protection along with neutral ground links. Service entrance rated QCM's that are 1200A and greater come standard with arc flash reduction features.

Table 13: Accessory Code 1

Rating	Alpha Numeric
Non-Service Entrance Rated	N
Service Entrance Rated	S

Accessory Code Position 1

The first position of the four-digit accessory code is reserved for future expansion to the QCM product line with 0 being the only available character at this time.

Table 14: Accessory Code 1

Description	Alpha Numeric
No Option (For Future Use)	0

Accessory Code Position 2

The second position of the four-digit accessory code offers a Phase Rotation Monitor.

- Phase Rotation Monitor uses a blue indicator light for confirmation of proper phasing when connecting a portable power source (Alternate Source).

Table 15: Accessory Code 2

Description	Alpha Numeric
No Option	0
Phase Rotation Monitor	2

Optional Leg Kit

A leg kit is available for QCM wall mount enclosures, which allows the unit to become free-standing. This kit is sold separately and can be purchased by using the part number below that corresponds to the enclosure material of the QCM.

Table 18: Leg Kit

Description	Part Number
Hot Rolled Steel – ANSI 61 Gray Powder Coat	QC-LK-474025-3A
Stainless Steel – 304 (#4 Brushed Finish)	QC-LK-474025-3C
Stainless Steel – 316 (#4 Brushed Finish)	QC-LK-474025-3D

Accessory Code Position 3

The third position of the four-digit accessory code provides the options for Space Heaters and Alternate Source Overcurrent Protection.

- Space Heaters operate on 120VAC and may include a control power transformer when necessary. Overcurrent protection and an adjustable thermostat are also provided.
- Alternate Source (Source 2) Overcurrent Protection is available on Service Entrance Rated QCM's and will mirror the Overcurrent protection utilized on the Normal Source (Source 1). Reference Table 1, Table 2, Table 3, & Table 4.

Table 16: Accessory Code 3


Description	Alpha Numeric
No Option	0
Space Heater	1
Alternate Source Overcurrent Protection	2
Space Heater & Alternate Source Overcurrent Protection	3

Accessory Code Position 4

The fourth position of the four-digit accessory code is a fixed manufacturer code with 0 being the only available character at this time.



Table 17: Accessory Code 4

Description	Alpha Numeric
No Option (Fixed Code)	0

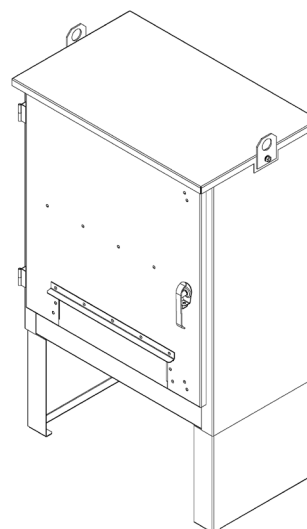


Weights & Dimensions


Molded Case (150A - 400A)

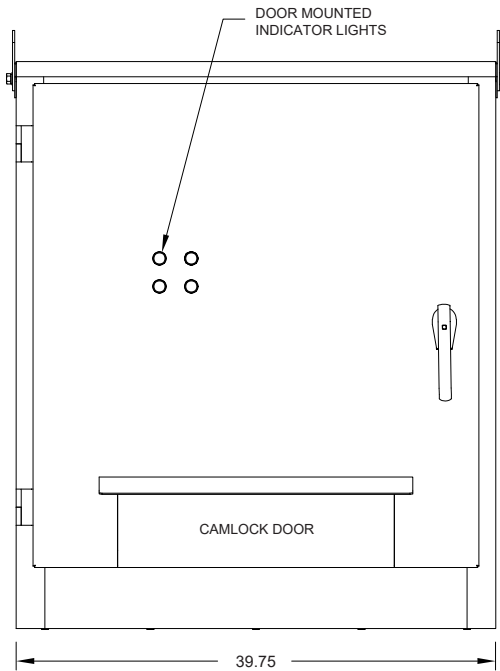


FRONT ELEVATION

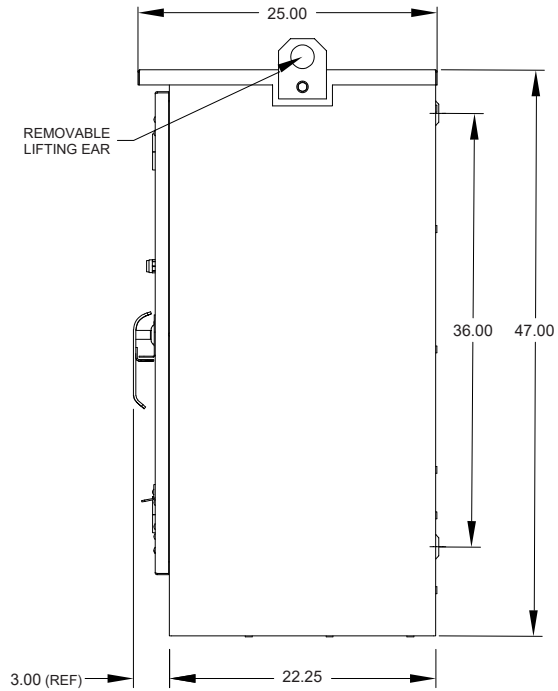

SIDE ELEVATION

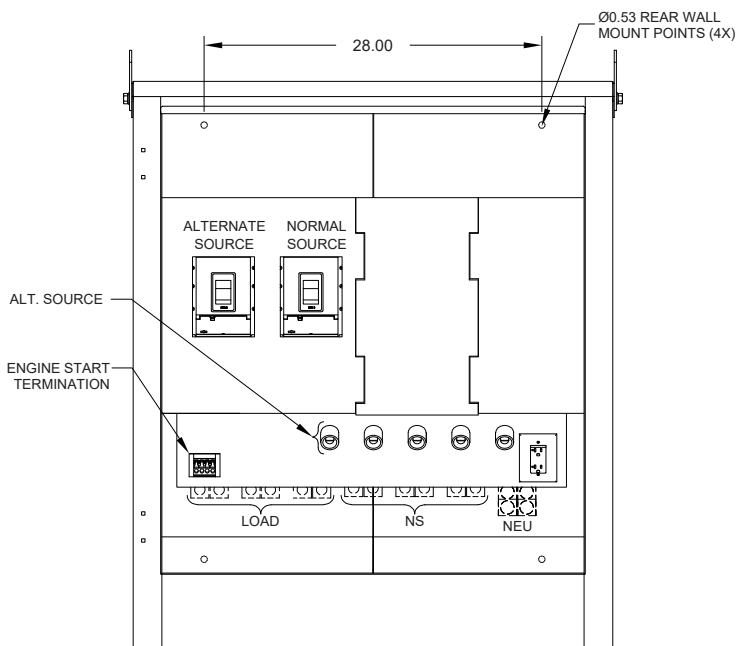

FRONT ELEVATION
DOOR REMOVED


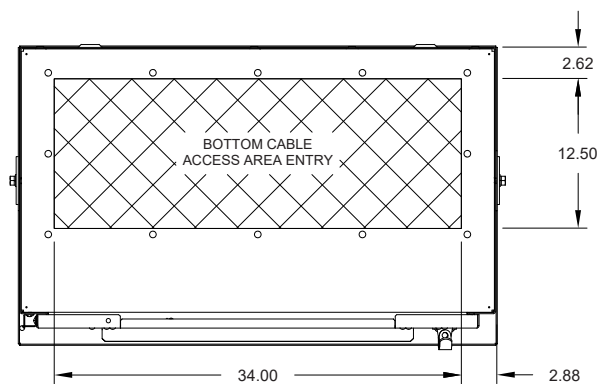


PLAN VIEW
FRONT


CONNECT

Weights & Dimensions


Molded Case (800A - 1200A)

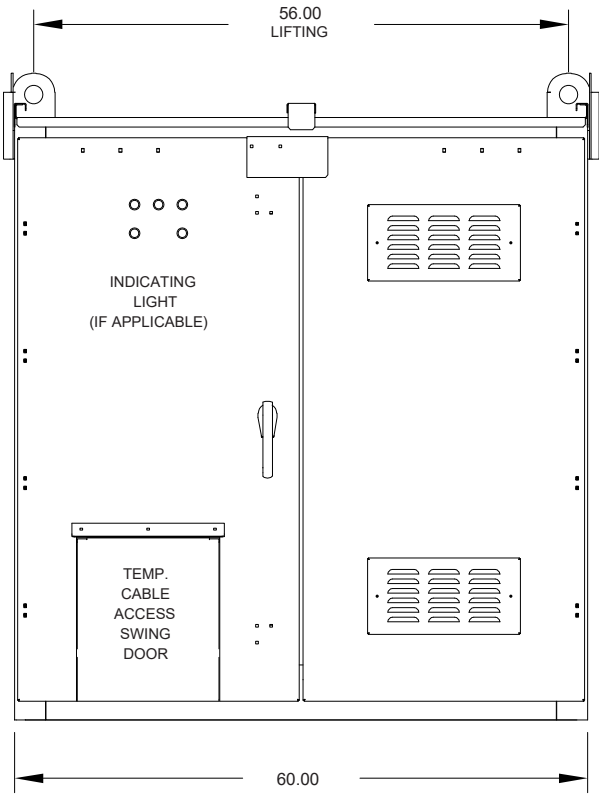


FRONT ELEVATION

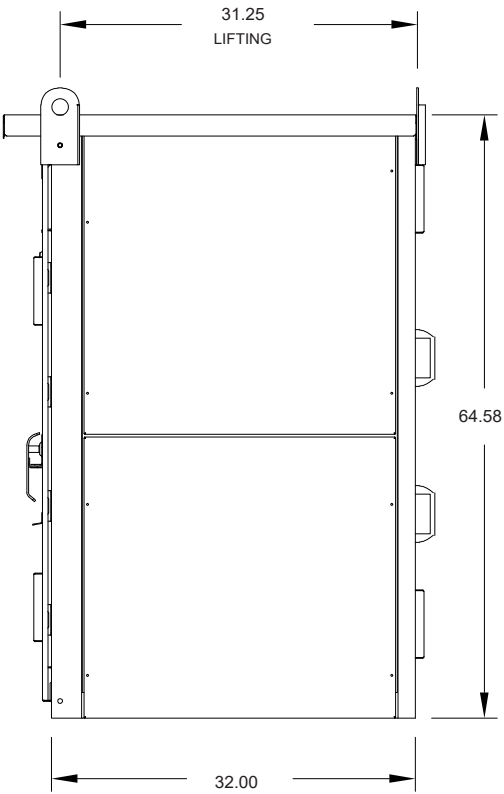

SIDE ELEVATION

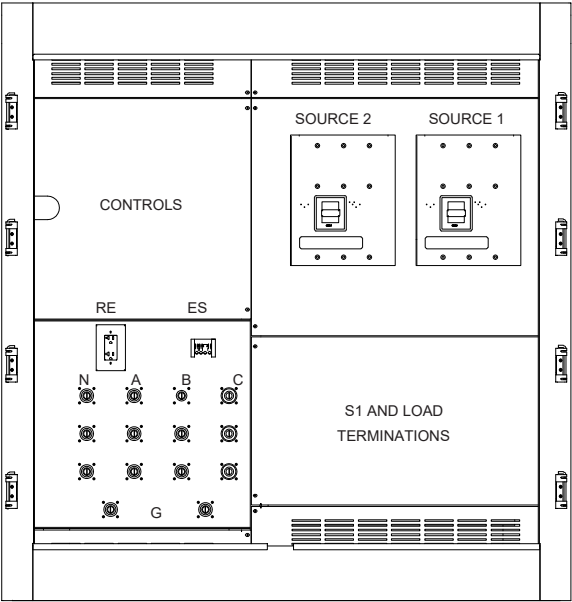

FRONT ELEVATION
DOOR REMOVED





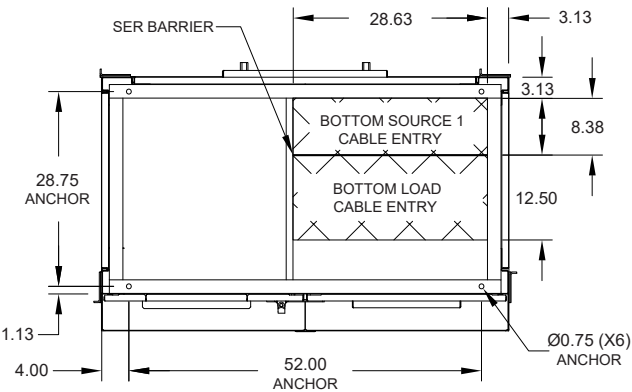


PLAN VIEW
FRONT

CONNECT

Weights & Dimensions

Insulated Case (1600A - 3200A)

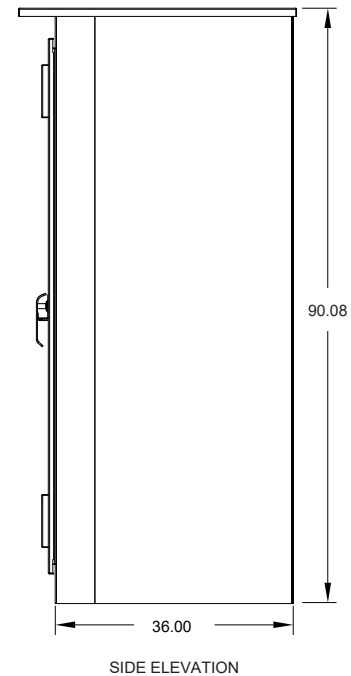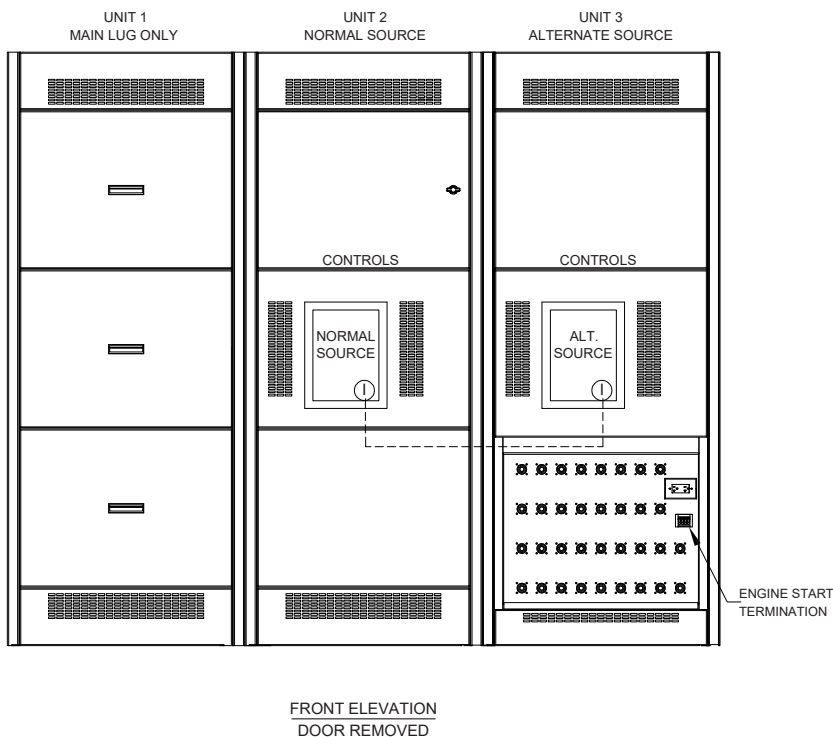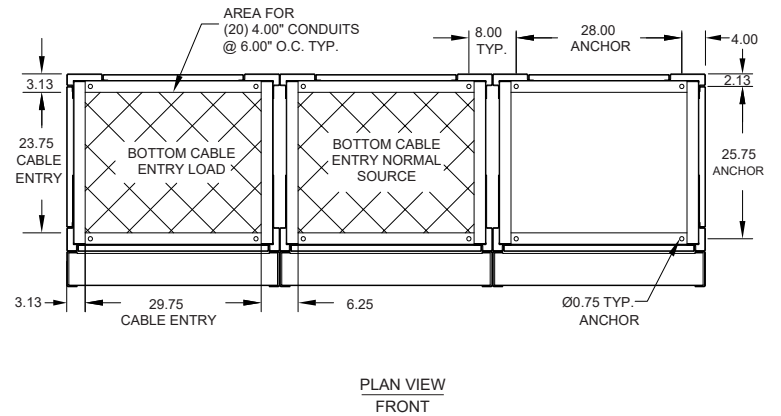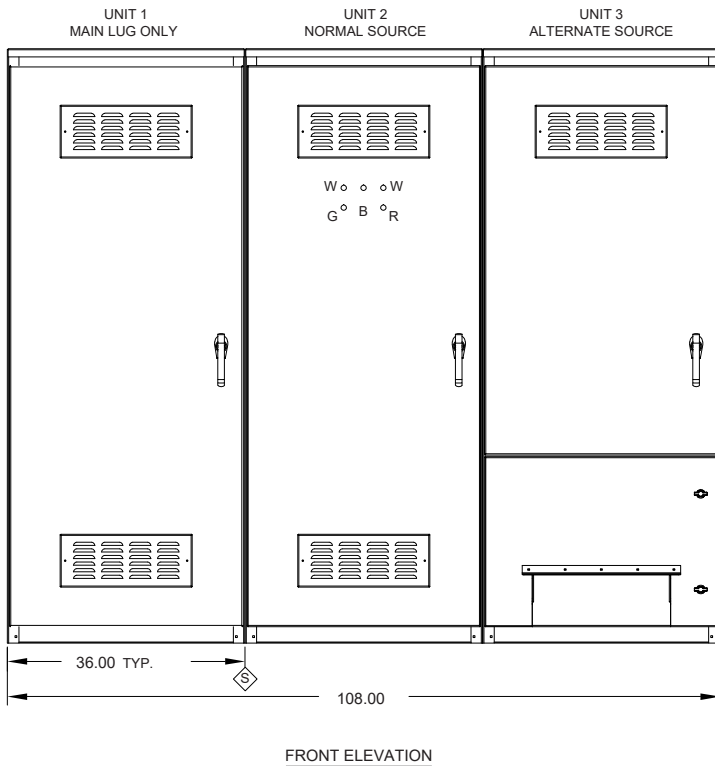

CONNECT

Connection Information

Lug Size & Quantity





Table 22: Permanent Cable Termination Data

Ampacity	Location	Standard Lugs: Qty. & Range	Ground
150A	Source 1	(1) #6 – 350MCM	(1) #14 – 1/0
	Load	(1) #6 – 350MCM	
	Neutral	(1) #6 – 350MCM	
400A	Source 1	(2) #2 – 600MCM	(1) #14 – 1/0
	Load	(2) #2 – 600MCM	
	Neutral	(2) #2 – 600MCM	
800A	Source 1	(4) 300 – 750MCM	(1) #6 – 350MCM
	Load	(4) 300 – 750MCM	
	Neutral	(4) 300 – 750MCM	
1200A	Source 1	(4) 300 – 750MCM	(1) #6 – 350MCM
	Load	(4) 300 – 750MCM	
	Neutral	(4) 300 – 750MCM	
1600A	Source 1	(5) 300-750MCM	(4) #6 – 350MCM
	Load	(5) 300-750MCM	
	Neutral	(5) 300-750MCM	
2000A	Source 1	(6) 300-750MCM	(4) #6 – 350MCM
	Load	(6) 300-750MCM	
	Neutral	(6) 300-750MCM	
3200A	Source 1	(8) 300 – 750MCM	(4) #6 – 350MCM
	Load	(8) 300 – 750MCM	
	Neutral	(8) 300 – 750MCM	
4000A	Source 1	(12) 300 – 750MCM	(4) #6 – 350MCM
	Load	(12) 300 – 750MCM	
	Neutral	(12) 300 – 750MCM	

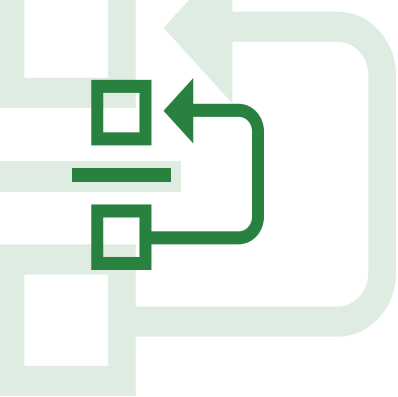

LSE

LAKE SHORE

E L E C T R I C

The information contained in this document is for general information purposes only. While Lake Shore Electric strives to keep the information up to date and correct, it makes no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability, or availability with respect to the information, products, services, or related graphics contained in the document for any purpose. Any reliance placed on such information is therefore strictly at your own risk. Lake Shore Electric reserves the right to discontinue any product or service at any time.

Global Headquarters:

Lake Shore Electric, LLC.
5 Hemisphere Way
Bedford, OH 44146

Contact Information:

Phone: 440.232.0200
E-Mail: Sales@lake-shore-electric.com
www.lake-shore-electric.com/connect